


ARTE METRA

SANIFIDESIGN IS A FUNCTIONAL AND DESIGNER FURNISHING THAT ALLOWS TO SANITIZE ENVIRONMENTS AND SURFACES 24- HOURS.

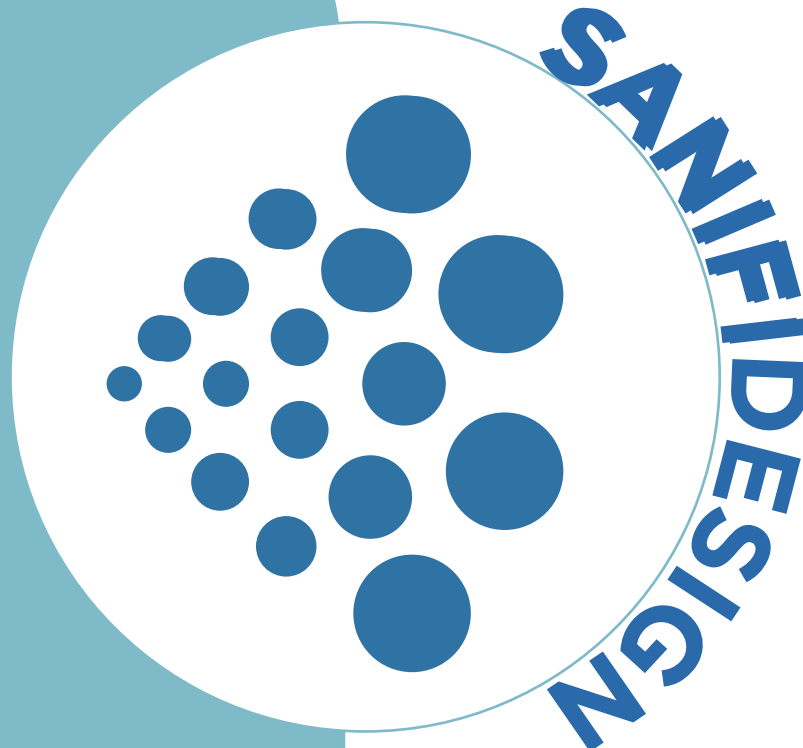


**THANKS TO SANIFIDESIGN
YOU'LL THE ASSURANCE
OF A CERTIFIED AND
EFFECTIVE SANITIZATION.**

PARTNER

RefineAir[®]
True Air System



MADE IN ITALY



CE

RESULT OR **DECOMPOSITION**
CARBON DIOXIDE +H₂O

BACTERIA AND POLLUTANT
DECOMPOSITION

HYDROXYL RADICALS (OH)
HYDROGEN PEROXIDE(H₂O₂)

UV LAMP

CATALYST ALLOY

OPERATION AND BENEFIT

THANKS TO SANIFIDESIGN TECHNOLOGY WE ARE ABLE TO GUARANTEE BACTERIA, VIRUSES AND POLLUTANT DECOMPOSITION (ON AIR AND SURFACES)

FREE INSTALLATION

THE MODULES INVESTED BY THE AIR FLOW GENERATE THE PHOTO-CHEMICAL REACTION BINDING A MOLECULE ADDITION OF OXYGEN TO THOSE PRESENT OF HYDROGEN AND OXYGEN IN AMBIENT HUMIDITY, THUS GENERATING THE HYDROGEN PEROXIDE, KNOWN AS OXYGENATED WATER.

OXYGENATED WATER HAS A VERY HIGH EFFECTIVENESS IN THE DESTRUCTION OF THE MICROBIAL CHARGE, BOTH IN THE AIR AND, BY FALLING, ONTO SURFACES.

THANKS TO THE PHOTOCATALYTIC REACTION, THE GENERATED HYDROGEN PEROXIDE ATTACKS AND DESTROYS THE MOLECULAR STRUCTURE OF POLLUTING AGENTS, TAKING PROTONS FROM THE CELL AND GENERATING A WATER RECOMBINATION.

-99%

**VIRUSES,
BACTERIA,
MOLDS**

**GERMS, BACTERIA AND
VIRUSES ELIMINATION
TO FRONT DISEASES AND
ALLERGIES PROPAGATION**

-70%

**MELL
OF
SMOKE**

IMPROVE AIR QUALITY

-70%

**PET
SMEL**

STOP GERMS, BACTERIAS

**TEST REPORT AND CERTIFICATION SHOW HOW
SANIFIDESIGN GUARANTEES HIGH SANITIZATION
PERFORMANCES IMPROVING AIR QUALITY.**

-65%

**COOKING
SMELL**

-55%

**CHEMICAL
AGENTS
SMELL**


REDUCTION OF INVESTMENTS FOR THE
SANITATION OF ENVIRONMENTS AND
PROTECTION FOR WORKERS AND
OCCUPANTS.

POSSIBILITY OF USE IN ANY ENVIRONMENT
AND INTENDED USE, WE INTEGRATE THE
APPROPRIATE TECHNOLOGY ACCORDING TO
INDIVIDUAL NEEDS, SUBJECT TO A
PRELIMINARY TECHNICAL-SCIENTIFIC
DESIGN EVALUATION.


LESS SANITATION COSTS AND MORE PROTECTION
FOR JOB AREAS AFTER A TECHNICAL
PRELIMINARY SANIFIDESIGN COULD BE APPLIED
FOR ANY USE AND AMBIENT.
SANIFIDESIGN CAN BE INTEGRATED INTO:

- **CONTAINERS**
- **SHELVING**
- **BOISERIE**
- **TOTEM OR EXHIBITORS**
- **CASES AND COUNTERS**
- **DESIGN FURNITURES**


SANIFIDESIGN CAN BE
APPLIED FOR:




OFFICES




BAR



RESTAURANT




SHOPS



SCHOOLS



**BANKS AND POST
OFFICES**













GYM

VISIONTECH

FREE INSTALLATION
FINISHES:

- WOOD
- FENIX
- CORK
- INTEGRATION WITH EXISTING FURNITURE

***SUGGESTED FOR LARGER AND MOST CROWDED SPACES 600-900 M3/H**

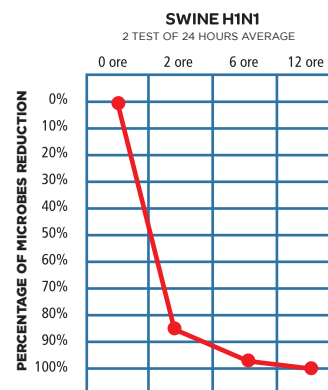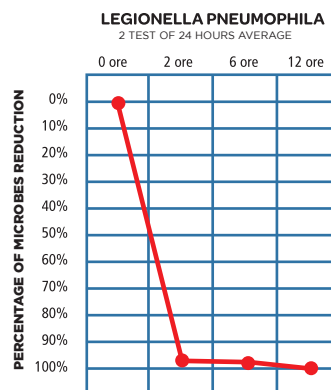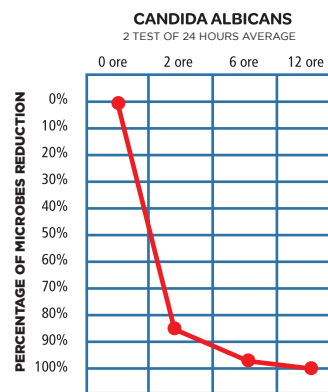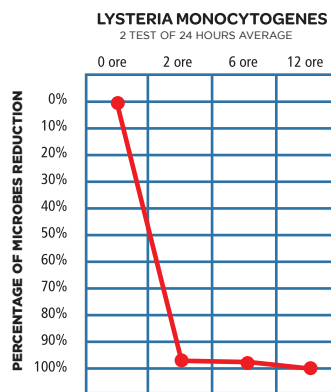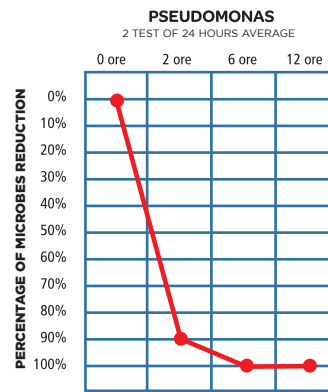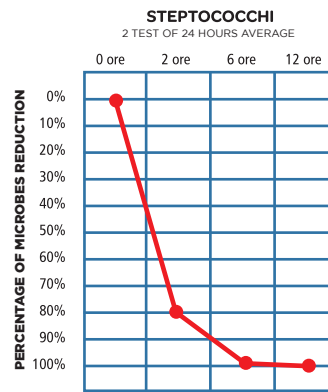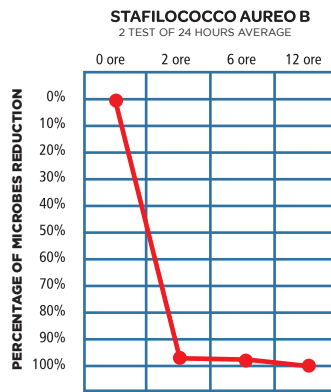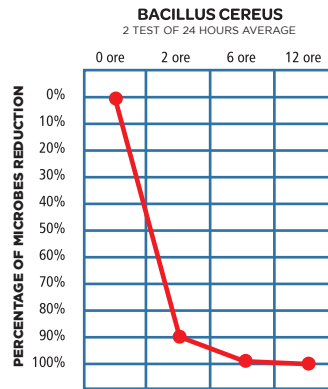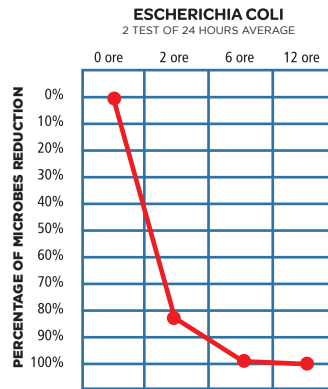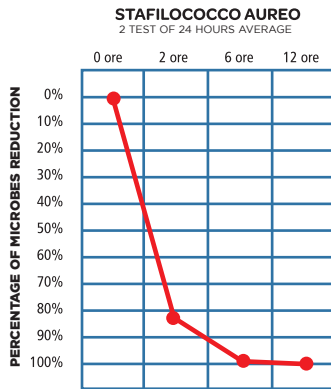

RAV.		RAV I MX4	RAV II MX4	RAV I IPG	RAV II IPG
Power supply	V-ph-Hz	230-1-50	230-1-50	230-1-50	230-1-50
Rotor speed	n°poli	4	4	4	4
Motors connection	-	Mono	Mono	Mono	Mono
Air flow from -a	m³/h	180-600	180-600	180-600	180-600
Sound power Lw	dB(A)	58	58	58	58
Sound power Lp	dB(A)	40	40	40	40
IN	A	0,24	0,24	0,24	0,24
Total absorbed power	w	70	90	64	78
Weight	Kg	32	34	32	34


CAMPTECH

FREE INSTALLATION
FINISHES:


- WOOD
- FENIX
- CORK
- INTEGRATION WITH EXISTING FURNITURE

***SUGGESTED FOR AREAS
180 M3/H**


STAFILOCOCCO AUREO
2 TEST OF 24 HOURS AVERAGE




ESCHERICHIA COLI
2 TEST OF 24 HOURS AVERAGE




BACILLUS CEREUS
2 TEST OF 24 HOURS AVERAGE




STAFILOCOCCO AUREO B
2 TEST OF 24 HOURS AVERAGE




STREPTOCOCCI
2 TEST OF 24 HOURS AVERAGE




PSEUDOMONAS
2 TEST OF 24 HOURS AVERAGE




LYSTERIA MONOCYTOGENES
2 TEST OF 24 HOURS AVERAGE





CANDIDA ALBICANS
2 TEST OF 24 HOURS AVERAGE



LEGIONELLA PNEUMOPHILA
2 TEST OF 24 HOURS AVERAGE



SWINE H1N1
2 TEST OF 24 HOURS AVERAGE

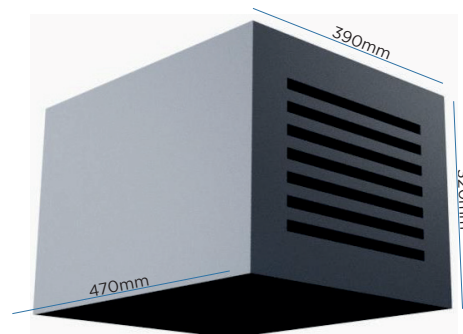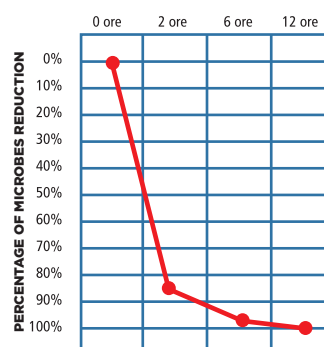

	LITTLE CAMP	BASIC	PLUS
Power supply	V-ph-Hz	230-1-50	230-1-50
Motors connection	-	Mono	Mono
Air flow from -a	m³/h	180	180
Sound power Lp	dB(A)	36	36
IN	A	0,100	0,100
Total absorbed power	W	27	42
Weight	kg	8	8


PHOTOTECH

FREE INSTALLATION
FINISHES:


- WOOD
- FENIX
- CORK
- INTEGRATION WITH EXISTING FURNITURE

***SUGGESTED FOR SMALL AREAS
73 M3/H**


STAFILOCOCCO AUREO
2 TEST OF 24 HOURS AVERAGE




ESCHERICHIA COLI
2 TEST OF 24 HOURS AVERAGE




BACILLUS CEREUS
2 TEST OF 24 HOURS AVERAGE




STAFILOCOCCO AUREO B
2 TEST OF 24 HOURS AVERAGE




STREPTOCOCCI
2 TEST OF 24 HOURS AVERAGE




PSEUDOMONAS
2 TEST OF 24 HOURS AVERAGE




LYSTERIA MONOCYTOGENES
2 TEST OF 24 HOURS AVERAGE





CANDIDA ALBICANS
2 TEST OF 24 HOURS AVERAGE



LEGIONELLA PNEUMOPHILA
2 TEST OF 24 HOURS AVERAGE



SWINE H1N1
2 TEST OF 24 HOURS AVERAGE

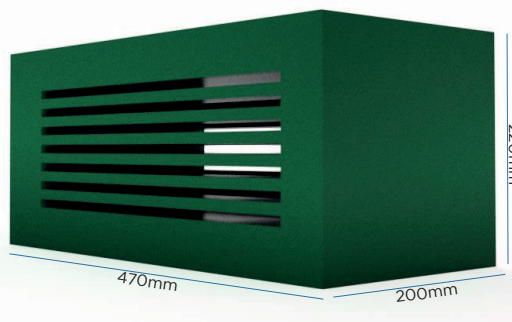


FOTOCATALISI + IONIZZAZIONE BIPOLARE

Power supply	V-ph-Hz	230-1-50
Air flow from -a	m ³ /h	73
Sound power Lp	dB(A)	32
IN	A	0,1
Total absorbed power	W	29
Weight	kg	5

PARTNER



MADE IN ITALY

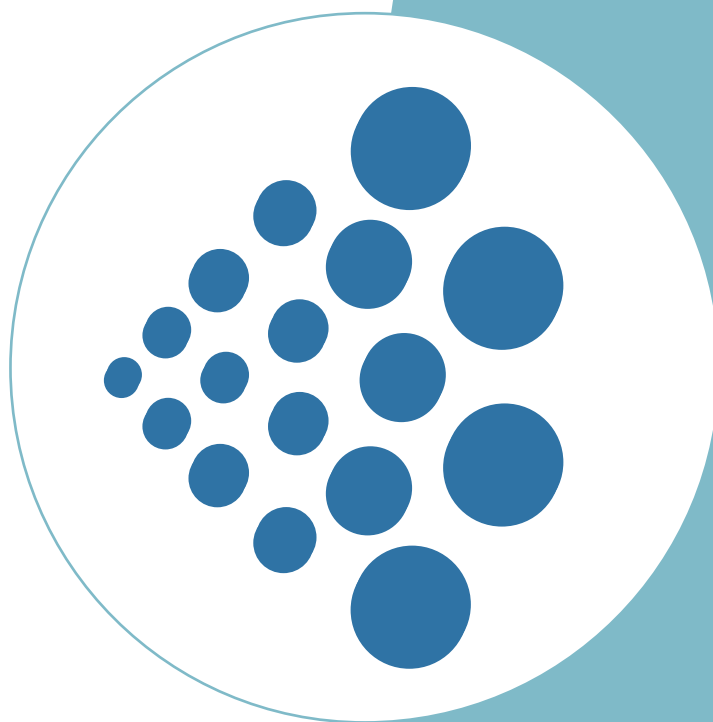

**ARTE
METRA**

www.artemetradesign.com
info@artemetradesign.it
Viale carlo III di Borbone, n°8 Cap
81100, Caserta (CE) P Iva / CF
04444110615 N° REA CE - 327354